

800X | ENDLESS 1600MM | HIGHGLOSS




DECORATIVE

Designs that are great for creating delicate decorative atmospheres.




ALLISON BIANCO

800X | ENDLESS 1600MM | HIGHGLOSS

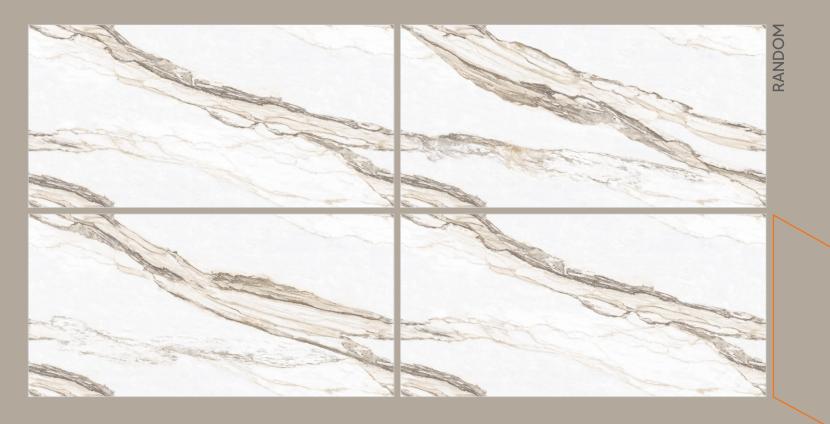



ALPS GREEN

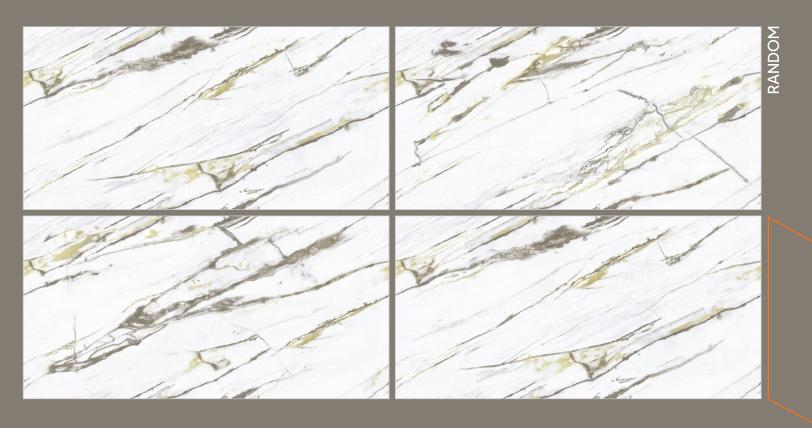



ANTICO CREMA

800X | ENDLESS 1600MM | HIGHGLOSS





ANTICO WHITE

800X | ENDLESS 1600MM | HIGHGLOSS





BERMUDA BEIGE

800X | ENDLESS 1600MM | HIGHGLOSS






BLACK ROSE

800X 1600MM

INTENSE ENDLESS HIGHGI OSS

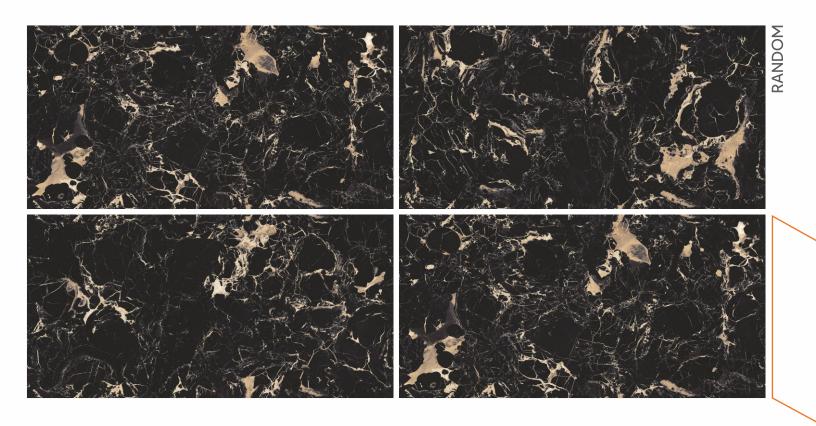




BRILLIANT STATUARIO






CALACATA RED

800X | ENDLESS 1600MM | HIGHGLOSS

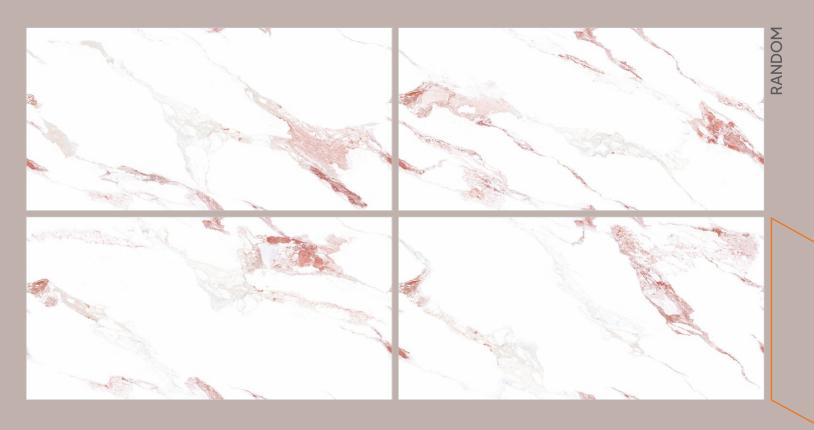



CALACUTTA ORO

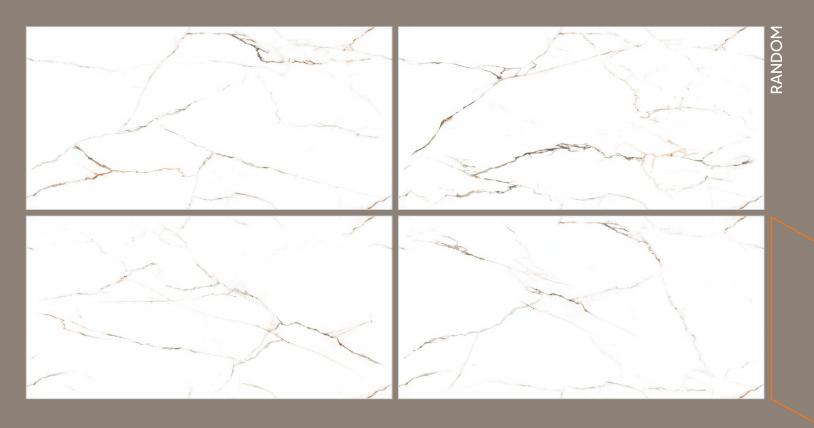



CANOVA BEIGE


800X | ENDLESS 1600MM | HIGHGLOSS





DOLCE BROWN

800X ENDLESS HIGHGLOSS

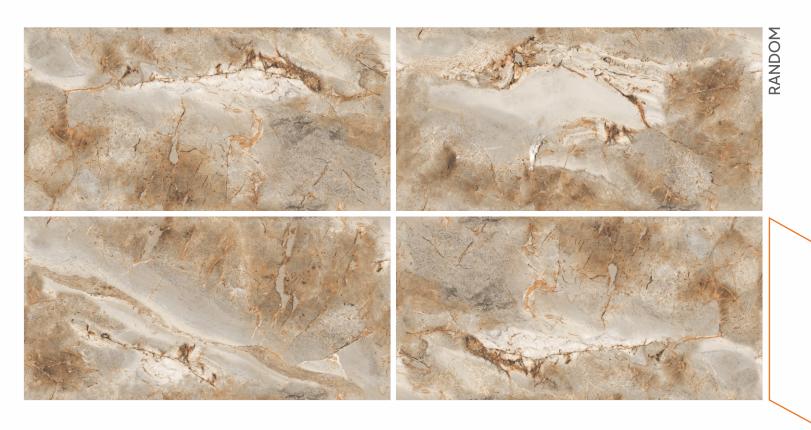



DYNA NATURAL

800X ENDLESS 1600MM HIGHGLOSS





DYNA SMOKE

800X ENDLESS HIGHGLOSS





EMILIA WHITE

800X | ENDLESS 1600MM | HIGHGLOSS





EPOQUE BEIGE

800X ENDLESS 1600MM HIGHGLOSS





EPOQUE BIANCO

800X | ENDLESS 1600MM | HIGHGLOSS





NOVELLA CREMA

800X | ENDLESS 1600MM | HIGHGLOSS





OXFORD WHITE





OXPORT BLUE

800X ENDLESS HIGHGLOSS






PATAGONIA MINK

800X 1600MM

DARK ENDLESS HIGHGLOSS

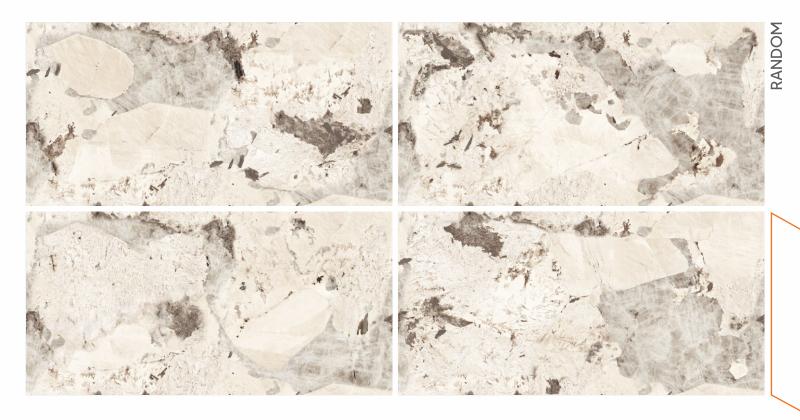







PIETRA SANTA





PULPIS BEIGE NEO





PULPIS GREY


800X ENDLESS 1600MM HIGHGLOSS





ROSALIA


800X ENDLESS 1600MM HIGHGLOSS

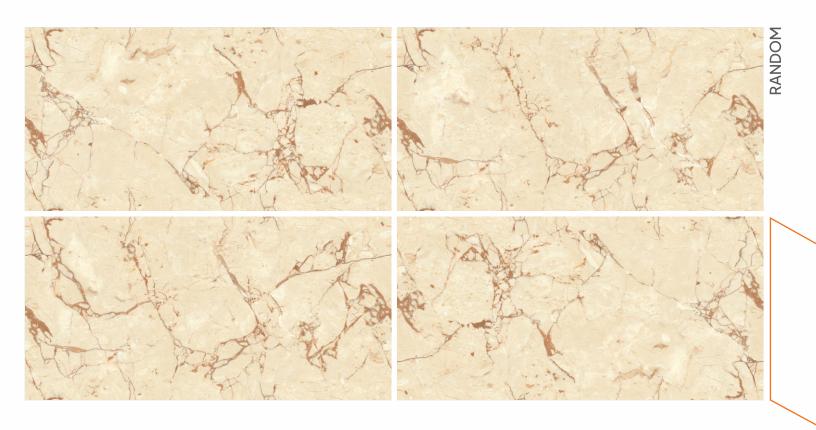



SATUARIO

800X | ENDLESS 1600MM | HIGHGLOSS

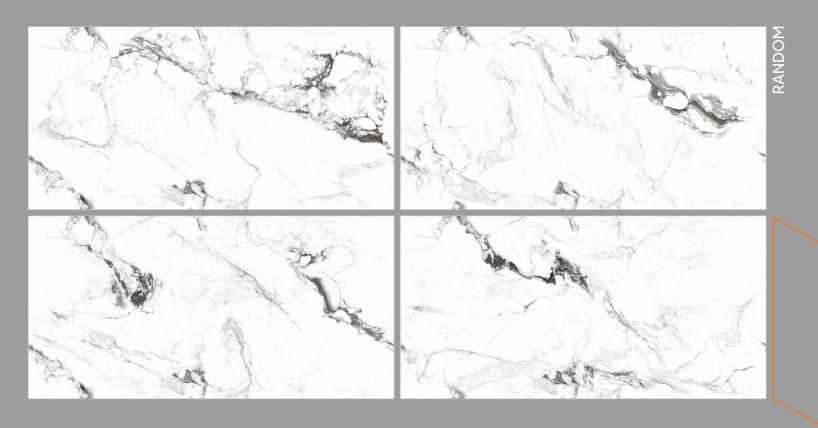



SATVARIO PRIZMA





SOFITA SILVER


800X | ENDLESS 1600MM | HIGHGLOSS





SOFITA WHITE


800X | ENDLESS 1600MM | HIGHGLOSS

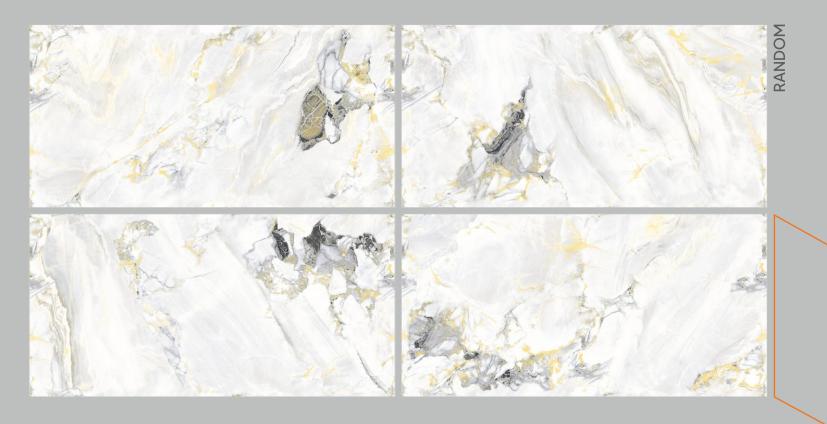



STATUARIO LINER

800X | ENDLESS 1600MM | HIGHGLOSS

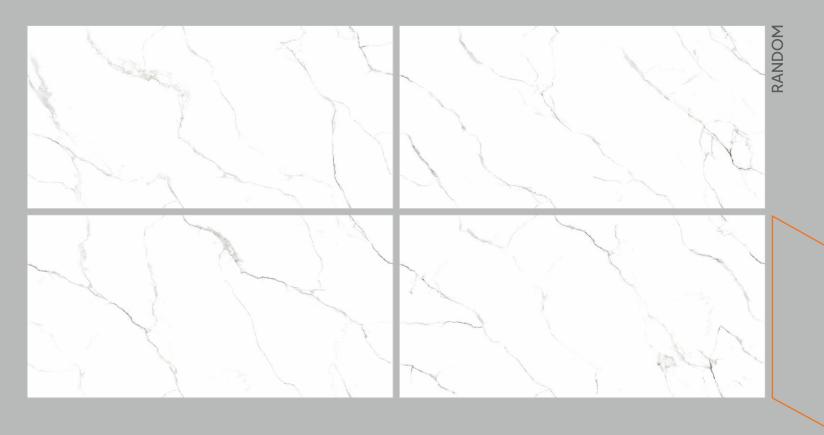




VALENCIA BEIGE

800X ENDLESS 1600MM HIGHGLOSS





VALENCIA WHITE

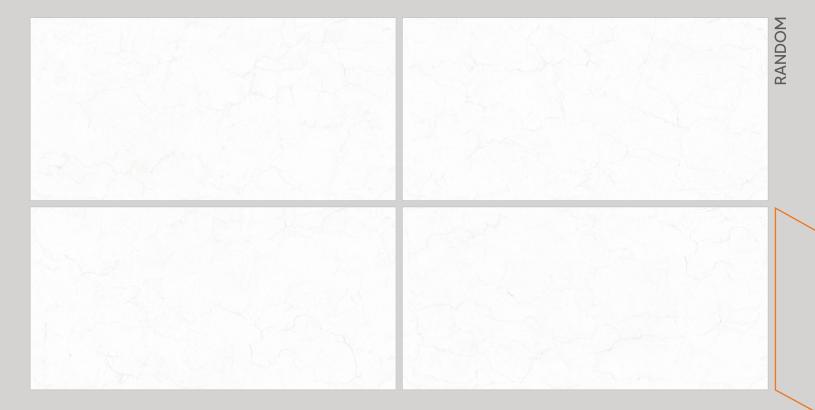



VARSACE GOLD

800X ENDLESS 1600MM HIGHGLOSS



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER IS0-13006/EN14411 GROUP Bla	VALUE	TEST METHOD
REGULATORY PROPERTIES	:		
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES	, to por ring		3.2000 T.M.2. 2. V.
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROF		g, cc	2
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PRO	PERTIES		
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PRO	DPERTIES		
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10-6	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	SO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off	As per mfg	Does not yield	ISO-10545-15
by glazed tiles		Pb & Cd	

PACKING DETAILS

Size	Tiles / Box	Coverage Area / Box	Coverage Area / Box
80X160CM	2 pcs	2.56 Sq. m.	27.55 Sq. ft.

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.